



PROCEDIMENTO DE CONTROLE DA QUALIDADE DE GUARNIÇÕES PARA FREIOS
BRAKE LINING QUALITY CONTROL TEST PROCEDURE
 SAE J 661a - NBR 5541

MATERIAL: AF/555-1

LOTE: _____

Programa Nº: _____

Program. No. _____

Máquina Nº: _____

Machine No. _____

Operador: _____

Operator _____

Visto: _____

Visa _____

M.ESPECÍFICA (NBR 5544): 2,19 g/cm³
 Specific Gravity

DUREZA (NBR 5520): 19 GC
 Hardness

DESGASTE
 Wear Data

Espessura, mm Peso, gr
 Thickness Weight

INICIAL: _____

Start

FINAL: _____

Finish

PERDA: 0,23 0,460

Loss

% _____

ENSAIO DESGASTE 204 °C: 0,20 mm
 Wear Test 400 °F

TAXA DESGASTE 204 °C: _____ cm³/Kwh
 Wear Rate 400 °F

COEFICIENTE DE ATRITO:
 Coefficient of Friction



NORMAL: 0,510 G
 Normal

QUENTE: 0,500 G
 Hot

ENSAIO Nº: _____ DATA:
 Test No. Date

13/8/2004

EF 90.121

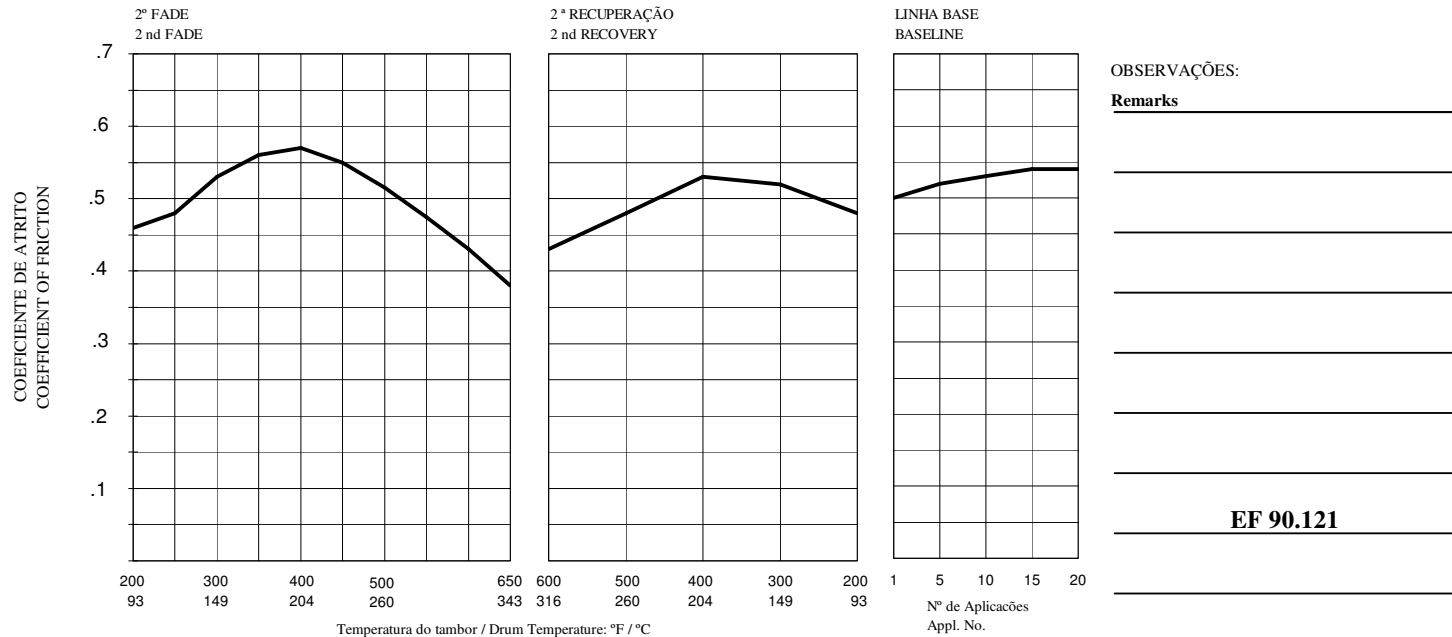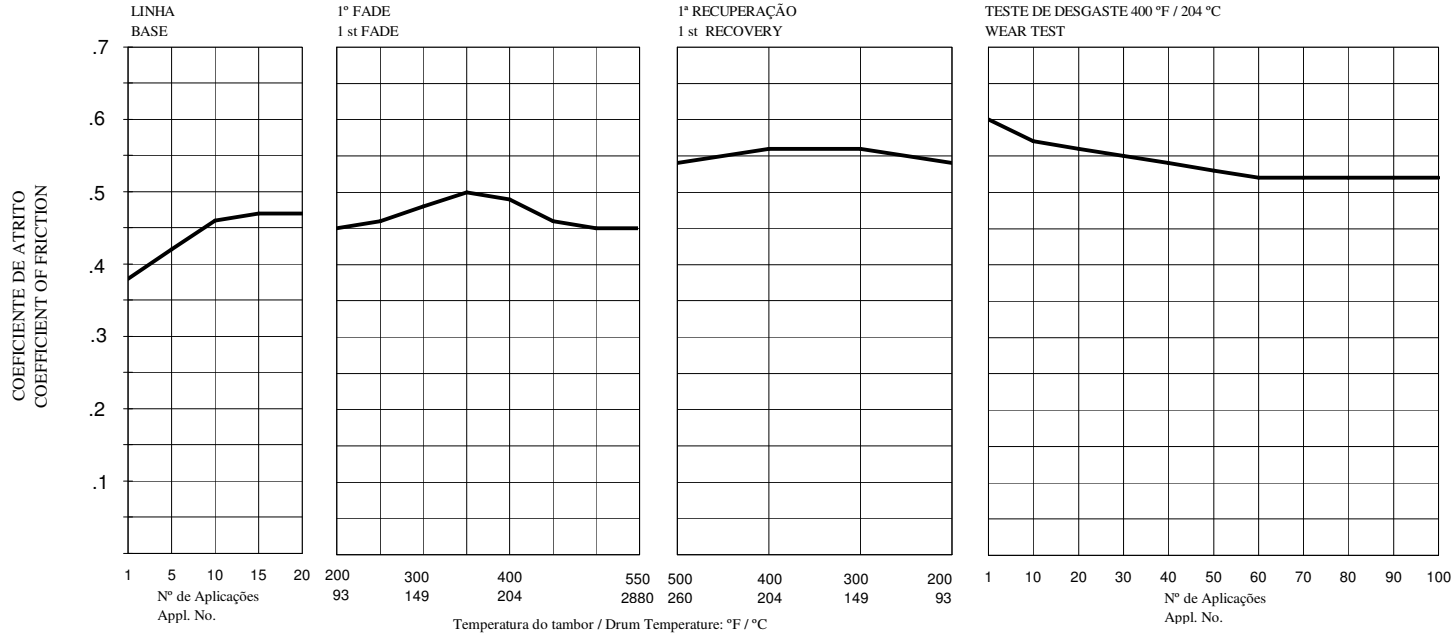

OBSERVAÇÕES:

Remarks _____
