


# LonaFlex NA/10


## High Performance Premium

### Typical Friction Result

#### Fade

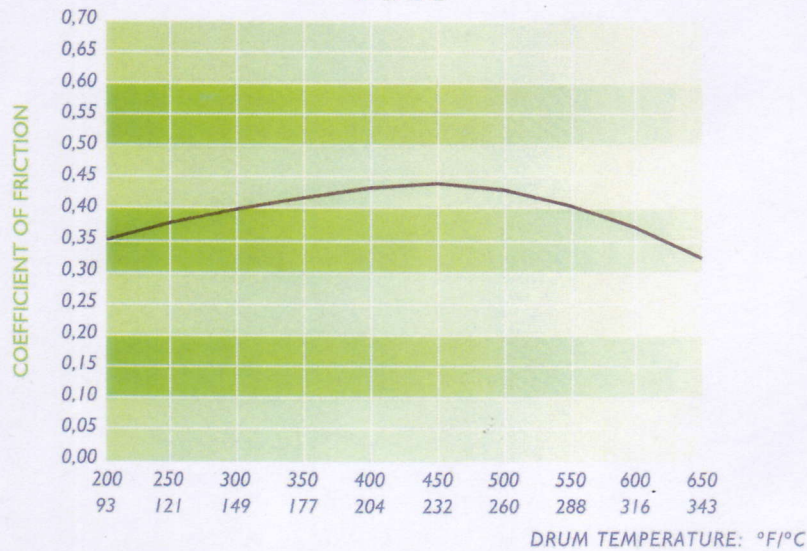

#### Recovery

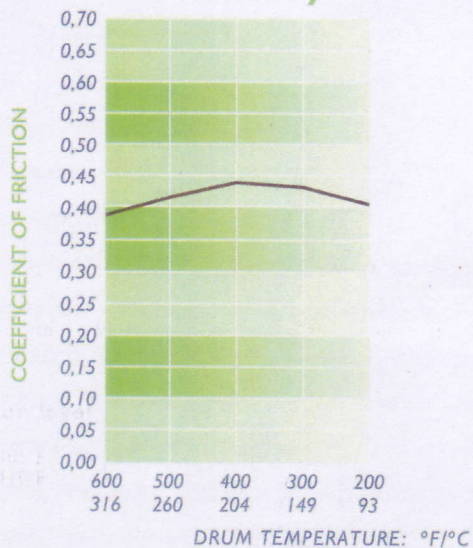

Gliding speed: max.: 18m/s

Peak working temperatures:

Operating temperature: 260 °C  
Short time temperature: 500 °C

Specific gravity (SAE J 380) 2.05 g/cm<sup>3</sup>

Gogan hardness (SAE J 379) 21 GC

Internal shear strength (ISO 6311) 16 N/mm<sup>2</sup>

Compressive strength (BS 2782) 95 N/mm<sup>2</sup>

Typical friction level

$\mu$  normal 0.385 F  
 $\mu$  hot 0.410 F

# LonaFlex

RS 122, KM 66, nº 10.945 - P.O.Box 3535 - 95115-970  
Caxias do Sul - RS - Brazil  
Phone: 55 54 209.1955 - Fax: 55 54 209.1921  
export@fras-le.com.br - www.fras-le.com.br

LonaFlex Distributor

